

**KOBELCO**

**Chromate-free, environment-friendly**

# **GALVANIZED STEEL SHEETS**

**ZINKOBELLA**

**GALKOBE**

**GALKOBE**

**(Galvannealed)**

**KOBE STEEL, LTD.**

With enhanced needs of higher quality of products, labor saving in manufacturing processes and pollution prevention, galvanized steel sheets have been extensively used for automobiles, household appliances, and construction materials. The demand has been increasingly expanded along with the improvement of peoples' living and culture. Kobe Steel has devoted itself to improve the quality of galvanized steel sheets, and develop proprietary products to meet the customer needs.

This catalog covers various types of galvanized steel sheets manufactured by Kobe Steel. We hope this helps you to select appropriate galvanized steel sheets for your particular application.

## Contents

Features .....	1
Galvanized steel sheet products (Product list, Chemical conversion coating) .....	2
Applications and optimum grades .....	5
Manufacturing Processes .....	6
Product characteristics (Corrosion resistance, Paint ability, Workability, Weldability) .....	10
Specification and range of available products .....	14
Packaging and Identification .....	24
Notes for use .....	25

## Features

### Environment-friendly, complete chromate-free

Kobe Steel commercialized the world first chromate-free galvanized steel sheet in 1998, and today all the galvanized steel sheets are chromate-free. The chromate-free steel sheet is environment-friendly, and complies with various regulations, such as RoHS and ELV, which can be used extensively without problems.

### Excellent corrosion resistance

The steel sheet is covered with a uniform zinc-plated layer by controlling the amount of zinc coating. The zinc-plated layer itself is chemically treated, which ensures excellent corrosion resistance.

### Outstanding appearance and workability

The galvanized surface is smooth and uniform, thanks to advanced production facilities and a sophisticated quality control system that guarantee excellent workability, paintability, and weldability.

### Wide product range

We supply different grades of galvanized steel sheet for various uses, including automobiles, electrical appliances, and construction materials. The quality of the base steel, the amount and composition of the zinc coating, and the subsequent chemical conversion coatings are all specifically designed to provide optimum performance for each application.

### Timely technical services

For use of galvanized steel sheets, please consult our sales or technical service section. Kobe Steel provides timely customer-oriented technical services, based on plenty of experience.

### Cautions

The technical information contained in this catalog is to illustrate general characteristics and/or performances, but not to guarantee anything. The technical information contained in this catalog may not be applicable depending on the purpose, environment, or conditions of use. This catalog is subject to change without notice. For updated information, please consult our relevant section.

# Galvanized steel sheet products

Kobe Steel manufactures and markets the following galvanized steel sheet products for a wide variety of industrial applications.

## Product list

Type of coating	Product name	Zinc coating mass		Chemical conversion coating	Features
Electrogalvanized steel sheet	<b>ZINKOBELLA</b>	30g/m <sup>2</sup> or less (one side) <small>Note 1</small>	JIS classification: ES-E24 <small>Note 1</small>	Phosphate treatment... <b>GREEN COTE GX-GP</b> Anti-fingerprint treatment... <b>GREEN COTE GX-K2</b> Anti-fingerprint treatment... <b>GREEN COTE GX-KS</b> Lubricant treatment... <b>GREEN COTE GX-J2</b>  <small>* All are chromate-free treatment.</small>	<ul style="list-style-type: none"> <li>•Steel sheet featuring excellent workability is uniformly galvanized to produce a smooth, attractive surface finish.</li> <li>•A chemical conversion coating applied after galvanizing provides added protection against corrosion and improves paintability.</li> <li>•Because the galvanized coating is thin, the finished steel sheet is easily welded.</li> <li>•Chemical conversion coatings are also applied for high corrosion resistance, and good anti-fingerprint and lubrication characteristics.</li> <li>•Conforms to JIS G 3313 and equivalent standards.</li> </ul>
Hot-dip galvanized steel sheet	<b>GALKOBE</b>	30g/m <sup>2</sup> - 150g/m <sup>2</sup> (one side)	JIS classification: Z06-Z27 <small>Note 2</small>	Chromate-free Treatment <b>GREEN COTE GX-GC</b>	<ul style="list-style-type: none"> <li>•Because the galvanized coating is thick, the finished steel sheet is particularly resistant to corrosion.</li> <li>•Has an attractive metallic luster.</li> <li>•Zero-minimized spangle only.</li> <li>•Conforms to JIS G 3302 and equivalent standards.</li> </ul>
	<b>GALKOBE (Galvannealed)</b>	30g/m <sup>2</sup> - 90g/m <sup>2</sup> (one side)	JIS classification: F04-F12	Chromate-free Treatment <b>GREEN COTE GX-GC</b>	<ul style="list-style-type: none"> <li>•Heat-treated to produce a zinc-iron alloy surface for excellent paintability, weldability, and particularly outstanding corrosion resistance after painting.</li> <li>•Conforms to JIS G 3302 and equivalent standards.</li> </ul>

G90, G60 and A60 are approved by UL (Underwriters Laboratories, Inc.) of the U.S.

Note 1: For electrogalvanized steel sheets over 30 g/m<sup>2</sup> on one side, or JIS E24, please consult us.

Note 2: For hot-dip galvanized steel sheets over JIS Z27, please consult us.



Available in different grades with a variety of specialized coatings, Kobe Steel's galvanized steel sheets offer customized characteristics for an impressive range of applications. When deciding which type of steel sheet is best for you, please keep the following three points in mind.

Chemical conversion coating

Type of coating	Product name	Type of coating	Symbol	Coating structure	Features					
					Corrosion resistance	Paint ability	Anti-finger print properties	Lubricant properties	Weldability	Electric conductivity
Electrogalvanized steel sheet	ZINKOBELLA	Phosphate treatment	GX-GP		○	◎	○	○	○	○
		Anti-fingerprint treatment	GX-K2		◎	○	◎	○	○	○
			GX-KS		○	○	◎	○	○	◎
		Lubricant treatment	GX-J2		◎	○	◎	◎	○	○
Hot-dip galvanized steel sheet	GALKOBE	Chromate-free treatment	GX-GC		○	○	◎	○	○	○
	GALKOBE (Galvannealed)	Chromate-free treatment	GX-GC		○	◎	○	○	○	◎


Note 1: Electrogalvanized and hot-dip galvanized steel sheets with no chemical conversion coatings are oiled (symbol M), as a standard.  
 Note 2: Paint ability depends on the type of paint used and the chemical treatment applied before painting. A paint test should be conducted prior to painting.

Three key points for selection

- Will it be used indoors or outdoors?
- Will it be painted or unpainted?
- What characteristics - corrosion resistance, workability, weldability, etc. - are needed?

Application		Electrogalvanized steel sheet	Hot-dip galvanized	
		ZINKOBELLA	GALKOBE	GALKOBE (Galvannealed)
Automobiles	Exterior panels	○	○	○
	Interior panels	○	○	○
	Chassis	○	○	○
	Electrical components	○	○	○
Electrical appliances	Refrigerators, Washing machines	○	○	○
	Vending machines	○	○	○
	Outdoor air-conditioning units	○	○	○
	Display freezers	○	○	○
	AV & OA equipment	○	○	○
	Internal parts for home appliances	○	○	○
Electrical distribution panels	○	○	○	
Construction materials	Shutters and doors	○	○	○
	Guard rails	○	○	○
	Deck plates	○	○	○
	Identification plates	○	○	○
	Pipes for construction platforms	○	○	○
	Walls, partitions	○	○	○
Ducts	○	○	○	
Ceilings and floors	○	○	○	
Miscellaneous	Storage sheds	○	○	○
	Furniture	○	○	○
	Kerosene heaters	○	○	○

# Manufacturing processes

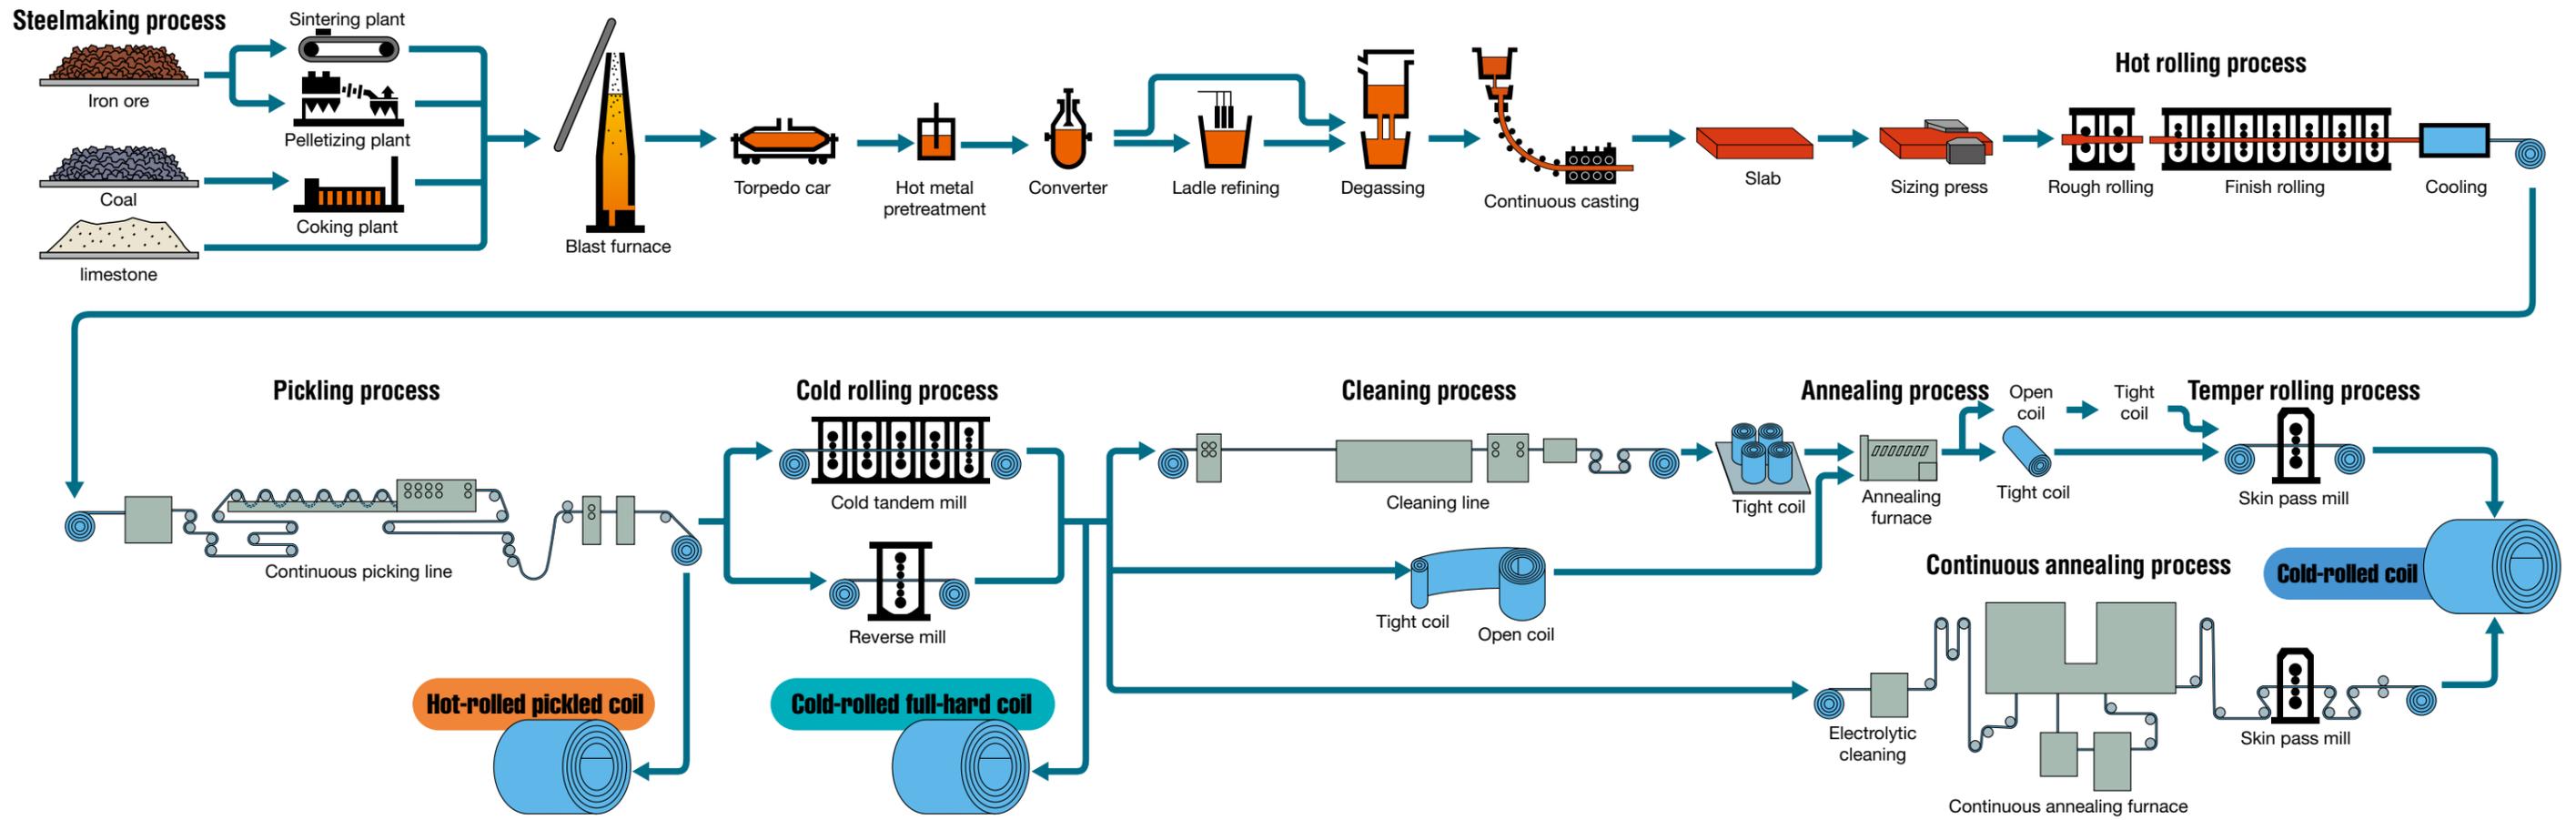

Blast furnace



Converter




Hot finish rolling mill



Cold tandem mill (cold tandem mill)



Continuous annealing furnace

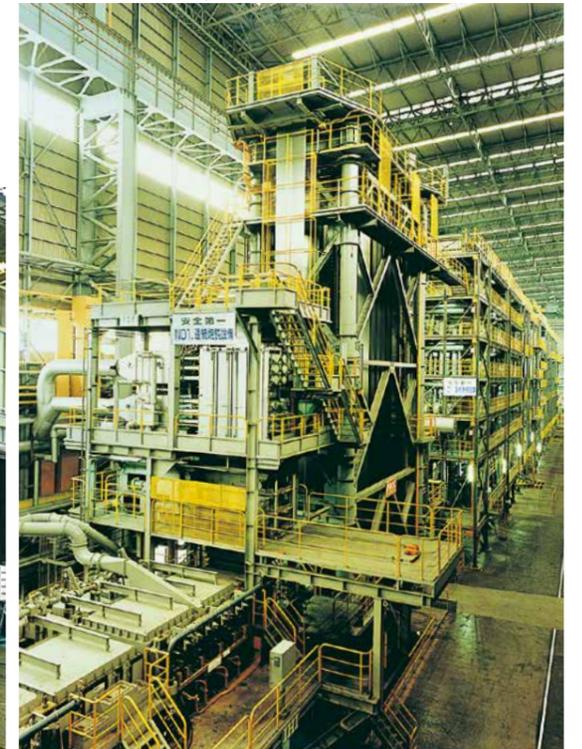

# Galvanizing process

## Electrogalvanizing line

### Welding process

The end of a steel sheet (either hot- or cold-rolled) is sheared and welded to the preceding coil to form one continuous coil.

### Straightening process

A high-performance tension leveler is used to straighten the strip, resulting in excellent flatness.

### Cleaning process

The strip is dipped in an alkali bath and brushed for preliminary degreasing, and then undergoes alkaline electrolytic degreasing. This removes impurities on the material surface that could harm the zinc coating. The strip is then dipped in an acidic bath to activate the surface.

### Galvanizing process


The cleaned strip enters the coating tank, where plating is carried out under strict bath control.

### Chemical treating process

The zinc-coated strip is given various chemical treatments according to intended use, including phosphate treatment for excellent paintability, and chromate-free special treatment for good corrosion resistance.



Electrogalvanizing line

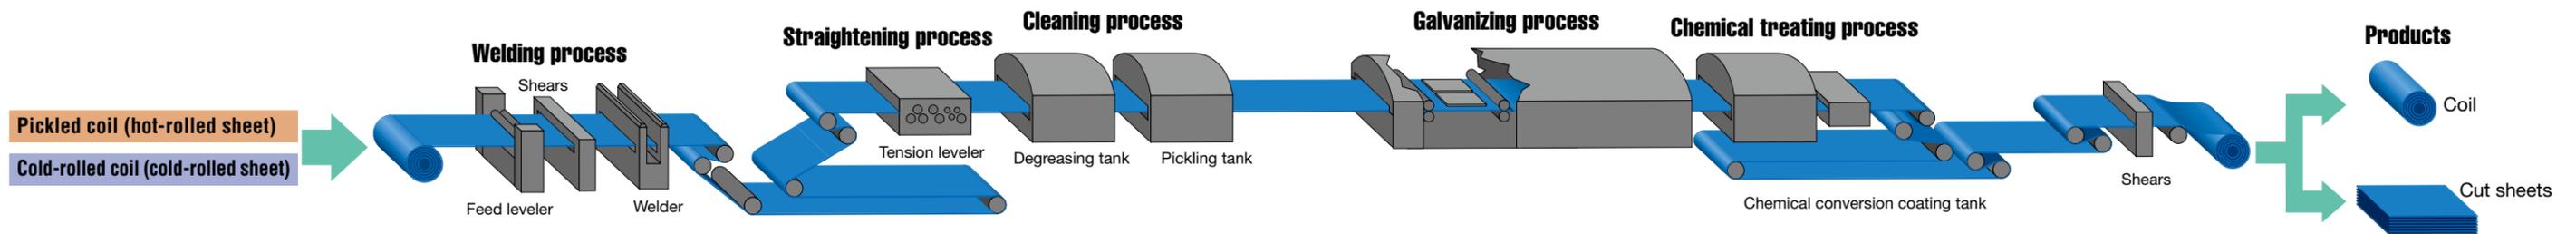

## Hot-dip galvanizing line

### Welding process

The end of a steel sheet (either hot- or cold-rolled) is sheared and welded to the preceding coil to form one continuous coil.

### Galvanizing process

After annealing, the strip remains in a reduction atmosphere and is dipped directly into a bath of molten zinc. The amount of zinc coating is controlled by means of the gas wiping method. Depending on the intended application, alloying treatment may be applied to the strip.

### Straightening process


Through the combined use of a high-performance tension leveler and skin pass mill, a product with excellent flatness and a smooth, attractive surface finish are obtained.

### Chemical treating process

A chromate-free special treatment is then applied to the zinc-coated strip, in accordance with the intended use.

### Continuous annealing process

The strip is continuously annealed in a reduction furnace, while reducing the thin oxidized film on the surface.

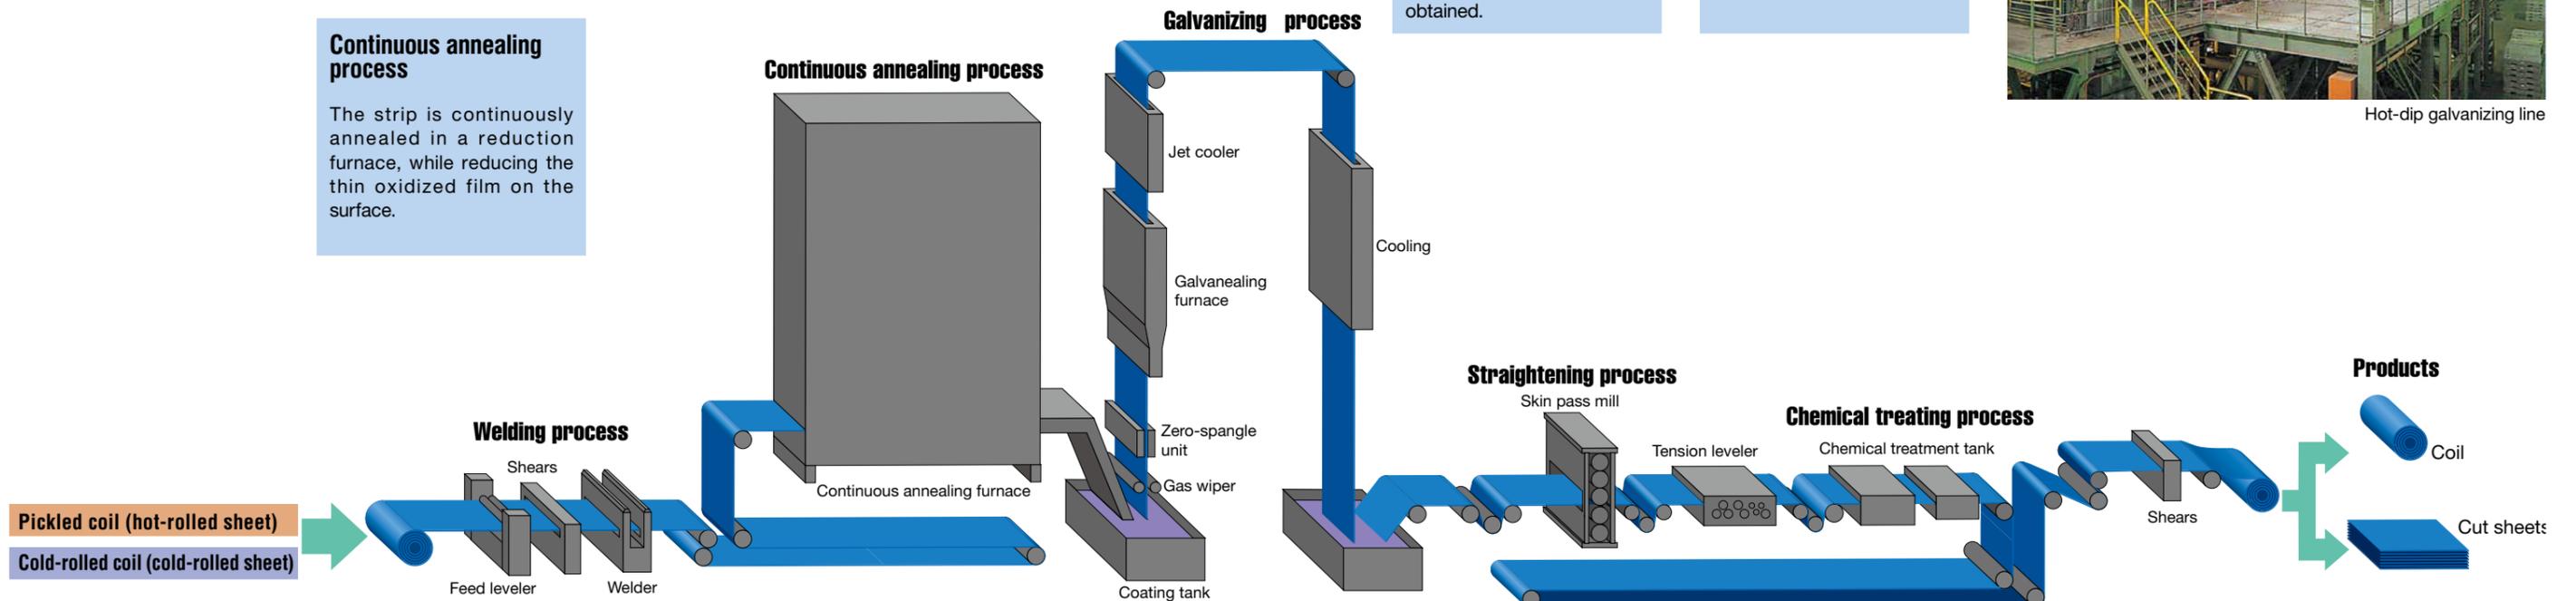

Hot-dip galvanizing line

# Product characteristics

## Excellent corrosion resistance


The uniform zinc coating protects the base steel from corrosion, and can withstand long-term use without generating rust.

- Zinc ionizes more easily than steel, and therefore acts as a sacrificial anode to protect the base steel from corrosion. This is called galvanic action. Even if the base steel is exposed, as for example at the sheet end or through a surface damage, the zinc coating surrounding the exposed part continues to protect the steel from rust.
- When zinc reacts to moisture in the air, it generates white rust. To prevent this, chromate-free and other special treatments are applied to the galvanized sheet.
- The time to take for red rust to develop on the base steel is proportional to the amount of zinc coating.


### Estimated zinc life under various environmental conditions (years)

	Rural	Seaside	Urban	Industrial
610 (Both sides) (g/m <sup>2</sup> )	50	35	25	15
381 (Both sides)	35	25	17	9
305 (Both sides)	25	15	10	7
90 (One side)	10	7	4	3
60 (One side)	7	5	3	2


### Galvanic action

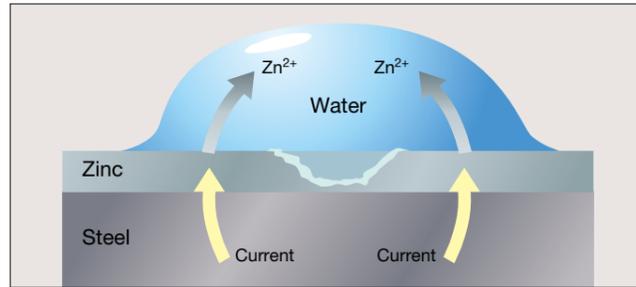

### Relationship between surface treatments and white rust (flat sheet, saltwater spray)

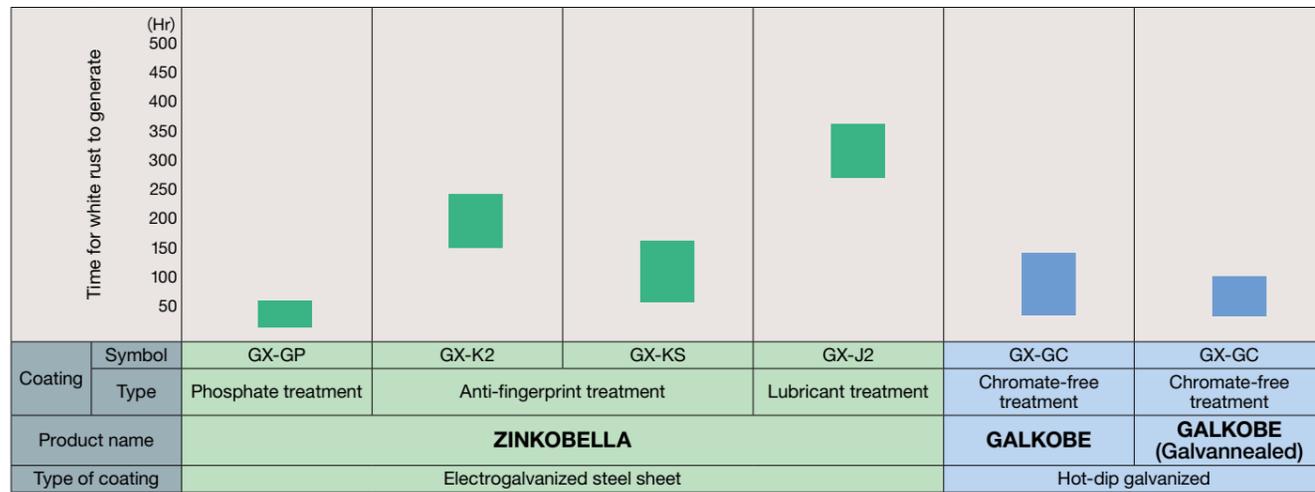

### Relationship between zinc coating mass and red rust (flat sheet, saltwater spray)

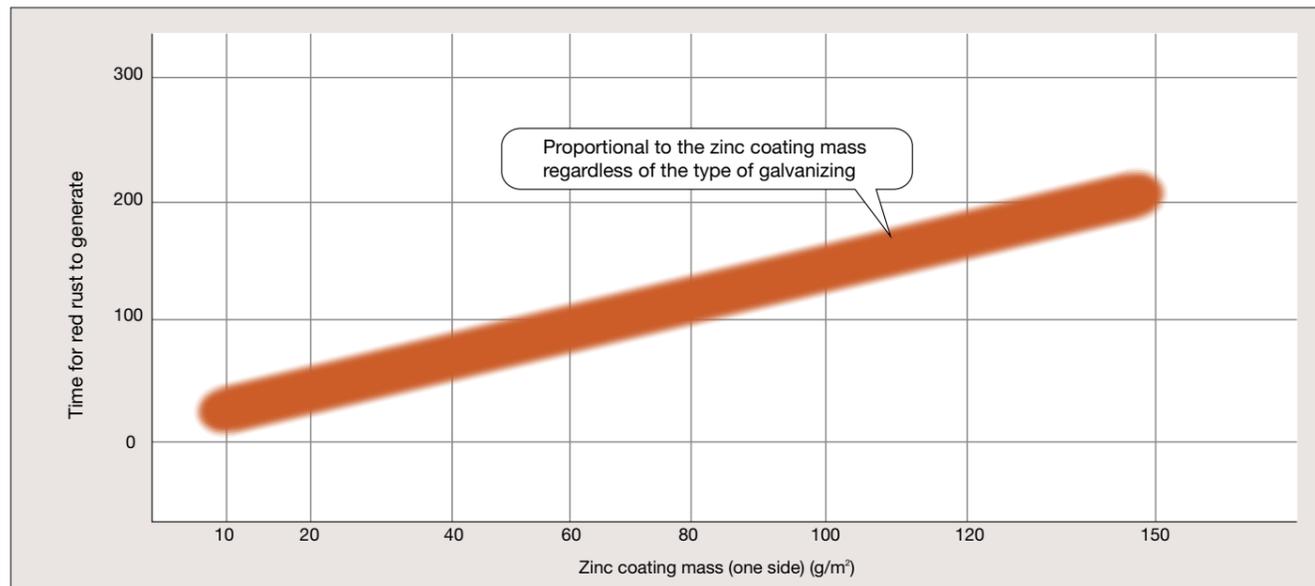


## Outstanding paintability

Excellent paintability is assured through appropriate pre-paint treatment.

Galvanized steel sheet is most often painted before use. To ensure proper paint adhesion, the surface must be thoroughly degreased and an appropriate chemical treatment shall be applied. The same fine, uniform chemical coatings as for cold-rolled sheet can be applied to all varieties of galvanized sheet.

Product type	Product name	Paint adhesion	Corrosion resistance of painted surface (external rust)
Electro galvanized steel sheet	<b>ZINKOBELLA</b>	◎	○
Hot-dip galvanized steel sheet	<b>GALCOBE</b>	◎	○
	<b>GALCOBE (Galvannealed)</b>	◎	◎
Cold-rolled steel sheet		◎	×

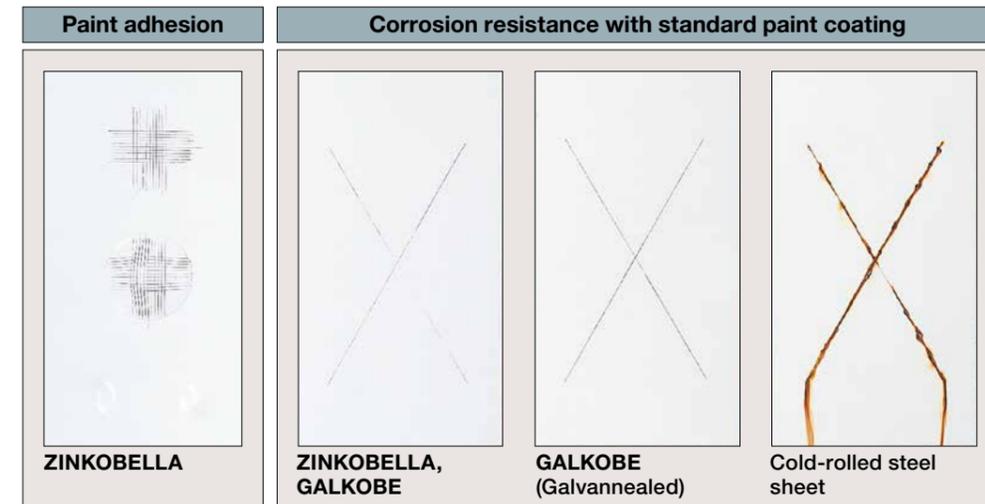


To reduce costs and environmental hazards, Kobe Steel also supplies galvanized steel sheet that has been chemical treated at the factory so that there is no need to prime the material before painting. In general, ZINKOBELLA (GX-GP treatment) and GALCOBE (Galvannealed) are most suitable for painting applications. For best results, choose a paint that is compatible with the chemical treatment applied.

**ZINKOBELLA**  
GX-GP treatment




The phosphate film generated on the sheet surface assures outstanding paint adhesion, with an extremely smooth and attractive paint finish that only electrogalvanizing can provide.

**GALCOBE**  
(Galvannealed)

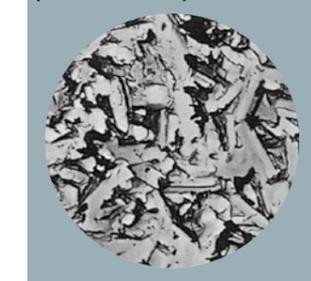

The alloying treatment diffuses iron particles in the coated surface to produce fine irregularities that ensure excellent paint adhesion.

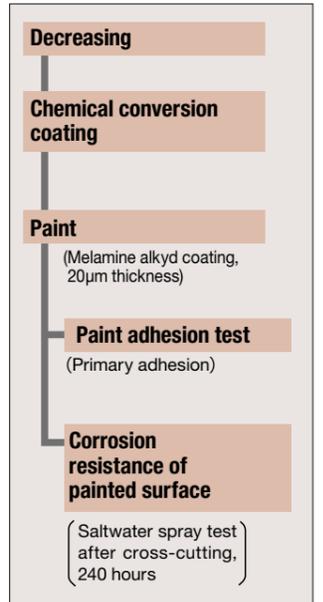

## Product characteristics

### Superior workability

Our carefully selected galvanized steel sheets manufactured under strict quality control all feature excellent workability.

When processing galvanized steel sheet, consideration must be given to the workability of both the base sheet and the coating. Since electrogalvanizing and hot-dip galvanizing are different processes, they result in different kinds of workability.




Deep-drawn GALKOBE

### Workability

Type of coating	Product name	Workability of base sheet	Workability of zinc-plated layer	Overall evaluation
Electrogalvanized steel sheet	ZINKOBELLA	The galvanizing process does not affect mechanical properties. In the electro-galvanizing process, steel sheets are not heat-affected; therefore, they maintain the same workability as that of hot-rolled and cold-rolled steel sheets.	While hot-dip galvanized steel sheets are composed of zinc and iron-zinc alloy coating, electrogalvanized steel sheets have pure zinc layer with excellent ductility, but no brittle iron-zinc alloy layer, which may cause peeling off with the former sheets.	Has the same workability as hot- and cold-rolled sheets.
Hot-dip galvanized steel sheet	GALKOBE	For hot-dip galvanized steel sheets, mechanical properties are given during a short time of the continuous annealing stage in the galvanizing process. However, they are heat-affected during the subsequent galvanizing stage; therefore, they lose some of their normal workability compared to the normal hot-rolled and cold-rolled steel sheets. By using higher-grade materials, products with good workability are available.	The surface layer is pure zinc, with excellent ductility. Between the base metal and the surface layer are thin alloyed-layers of iron and zinc, but their structure and thickness are strictly regulated so that the zinc-plated layer will not peel off.	Standard products are lightly less workable than hot- and cold-rolled sheets, but products with good workability are also manufactured by using higher-grade materials.
	GALKOBE (Galvannealed)		The surface layer consists of high-grade iron and zinc alloy, making it harder and less ductile than pure zinc. When subjected to server processing, tiny cracks can form in the alloyed layer, or the alloyed layer is powdered (this phenomenon is called powdering).	In terms of powdering, alloyed products are less workable than non-alloyed products. However, this rarely causes a problem in actual applications.

### Image of mechanical properties (Thickness 0.8mm)

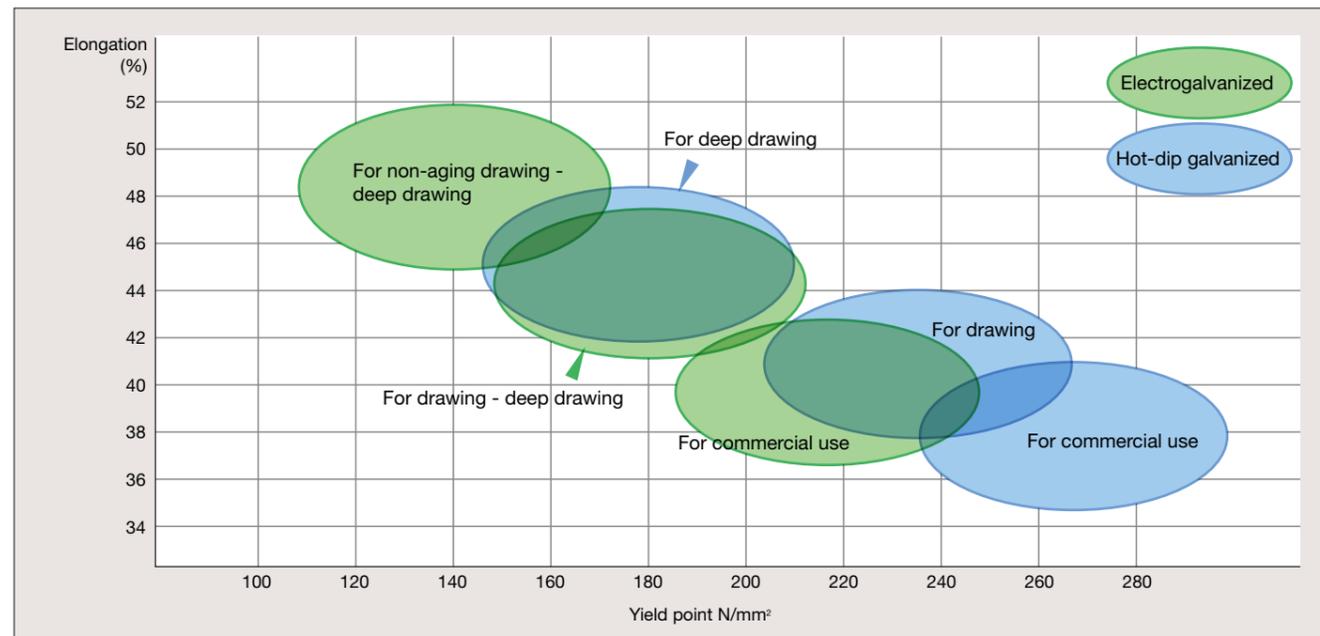

### Assured weldability

By maintaining proper welding conditions, you can achieve welding results comparable to those obtained with hot- and cold-rolled sheets.

When electric resistance welding, conditions for galvanized steel sheet differ somewhat from those for hot- and cold-rolled sheet because zinc is a soft metal with a low melting point. Also, when zinc adheres to the electrode, it forms a copper zinc alloy that impairs continuous welding efficiency. The higher the zinc coating, the stronger this tendency becomes. Because GALKOBE features harder surface layer with higher melting points, its welding conditions and continuous welding efficiency approach those of hot- and cold-rolled sheets.

Please keep the following points in mind when spot welding and seam welding galvanized steel sheets.


#### Spot welding

- Set the welding current 10-30% higher than usual.
- Extend the weld time 10% longer than usual.
- A Cr-Cu alloy electrode with a JIS-C type truncated cone tip is recommended.
- Clean the electrode often, and make sure you have adequate water-cooling.

#### Seam welding

- Set the welding current high.
- Control air bubbles and internal defects by increasing the welding pressure.
- Interrupted current is recommended. In addition, a high ratio of intervals with current to intervals without current should be maintained for best results in the welded sections.

### Relationship between zinc coating mass and weldability

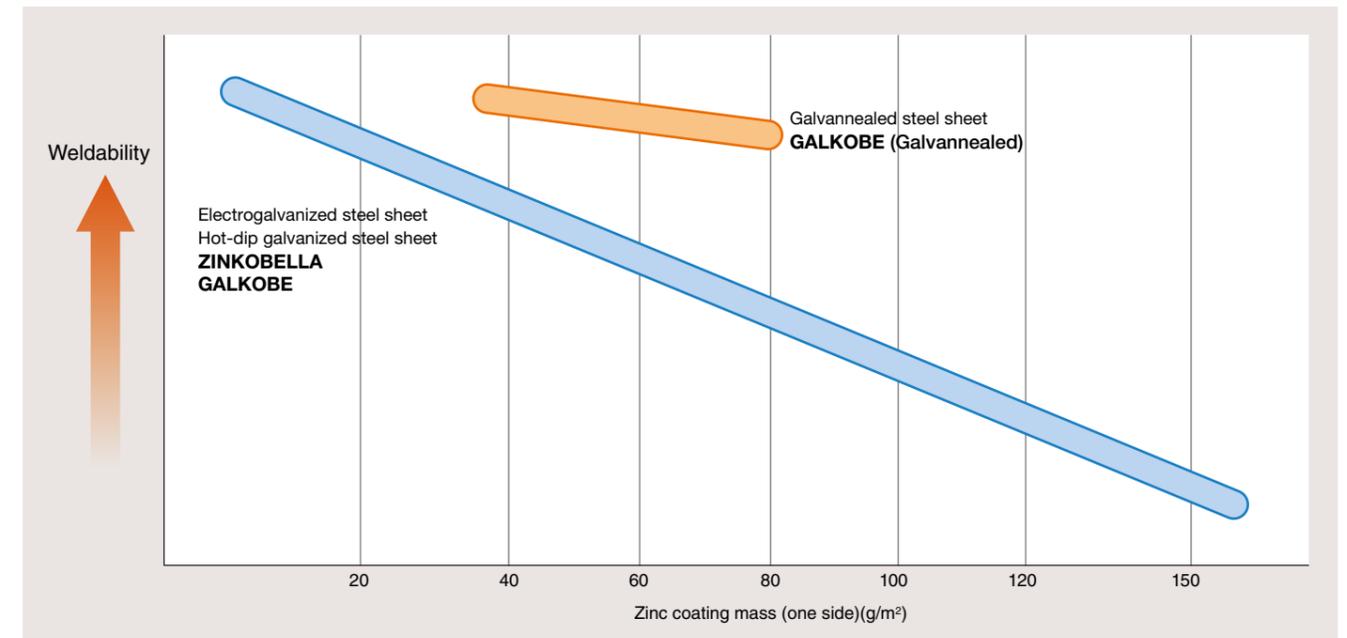

# Specification and range of available products

## Electrogalvanized steel sheet ZINKOBELLA

### Product types

#### hot-rolled sheet

Product symbol	Applications	Base sheet specification	JIS classification	Tensile test							Test piece (JIS)	Bending angle	Bending test			Test piece (JIS)		
				Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation%							No. of inner spacers					
						Thickness mm												
						1.6 to less than 2.0	2.0 to less than 2.5	2.5 to less than 3.15	3.15 to less than 3.2	3.2				Thickness, 1.6mm to less than 2.0mm	Thickness, 2.0mm to less than 3.2mm		Thickness, 3.2mm	
SEHC	For commercial use	SPHC	SEHC	—	270 and over	29 and over	29 and over	29 and over	29 and over	31 and over	No.5 rolling direction	180°	0 (Flat on itself)	0 (Flat on itself)	1	No. 3 rolling direction		
SEHD	For drawing	SPHD	SEHD	—	270 and over	32 and over	33 and over	35 and over	35 and over	37 and over					0 (Flat on itself)		0 (Flat on itself)	0 (Flat on itself)
SEHE	For deep drawing	SPHE	SEHE	—	270 and over	33 and over	35 and over	37 and over	37 and over	39 and over					0 (Flat on itself)			
SE400	For general structural use	SS400	SE400	245 and over	400 ~ 510	21 and over	21 and over	21 and over	21 and over	21 and over			3	3	3	No. 3 rolling direction		
SE490		SS490	SE490	285 and over	490 ~ 610	19 and over	19 and over	19 and over	19 and over	19 and over			4	4	4			
KBEH370	For structural use	SAPH370	SEPH370	225 and over	370 and over	32 and over	33 and over	35 and over	36 and over	36 and over			1	2	2	No.3 perpendicular to rolling direction		
KBEH400		SAPH400	SEPH400	255 and over	400 and over	31 and over	32 and over	34 and over	35 and over	35 and over			2	2	2			
KBEH440		SAPH440	SEPH440	305 and over	440 and over	29 and over	30 and over	32 and over	33 and over	33 and over			2	3	3			

Note 1: Values for the bending test represent the number of sheets of the same c as measured by the spacing of the inside of the bend.

#### Cold-rolled sheet

Product symbol	Applications	Base sheet specification	JIS classification	Tensile test								Test piece (JIS)	Bending test		
				Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation%							Bending angle	No. of inner spacers	Test piece (JIS)
						Thickness mm									
						0.40 to less than 0.60	0.60 to less than 1.0	1.0 to less than 1.6	1.6 to less than 2.3	2.3 to less than 2.5	2.5 and over or less 3.2				
SECC	For commercial use	SPCC	SECC	—	—	—	—	—	—	—	—	No.5 rolling direction	180°	0 (Flat on itself)	No.3 rolling direction
SECCT		SPCCT	SECCT	—	270 and over	34 and over	36 and over	37 and over	38 and over	38 and over	39 and over				
SECD	For drawing	SPCD	SECD	—	270 and over	36 and over	38 and over	39 and over	40 and over	40 and over	41 and over				
SECE	For deep drawing	SPCE	SECE	—	270 and over	38 and over	40 and over	41 and over	42 and over	42 and over	43 and over				
SECF	For non-aging deep drawing	SPCF	SECF	—	270 and over	40 and over	42 and over	43 and over	44 and over	44 and over	45 and over				
SECG	For non-aging extra deep drawing	SPCG	SECG	—	270 and over	42 and over	44 and over	45 and over	46 and over	46 and over	—				
KBEC340R	For drawing	KBCF340R	SEFC340	175 and over	340 and over	—	34 and over	35 and over	35 and over	—	—				No.5 perpendicular to rolling direction
KBEC390R	For forming	KBCF390R	SEFC390	235 and over	390 and over	—	30 and over	31 and over	31 and over	—	—				
KBEC440R		KBCF440R	—	260 and over	440 and over	—	26 and over	27 and over	27 and over	—	—				

Product symbol	Applications	Base sheet specification	Bending test			Hardness test	
			Bending angle	No. of inner spacers	Test piece (JIS)	HRB	HV
SECC-8D	For hardness	SPCC-8D	180°	0 (Flat on itself)	No.3 rolling direction	50~71	95~130
SECC-4D		SPCC-4D		1		65~80	115~150
SECC-2D		SPCC-2D		2		74~89	135~185
SECC-1D		SPCC-1D		—		85and over	170and over

Note 1: Values for the bending test represent the number of sheets of the same nominal thickness as measured by the spacing of the inside of the bend.

Note 2: Please consult us for high-tensile strength steel of 490 N/mm<sup>2</sup> or more.

Note 3: Hardness is measured in either HRB or HV; however, HRB is applicable unless otherwise specified.

# Specification and range of available products

## Zinc coating mass

Type	Symbol	Standard zinc coating mass (one side) g/m <sup>2</sup>	Minimum zinc coating mass (one side) g/m <sup>2</sup>	
			Equal thickness coating	Different thickness coating
JIS classification	ES	—	—	Note 1
	EB	3	2.5	—
	E8	10	8.5	8.0
	E16	20	17.0	16.0
	E24	30	25.5	24.0
	E32 <sup>Note 2</sup>	40	34.0	32.0
	E40 <sup>Note 2</sup>	50	42.5	40.0
One side	K	3	2.5	—
	10	10	8.5	8.0
	20	20	17.0	16.0
	30	30	25.5	24.0
	40 <sup>Note 2</sup>	40	34.0	32.0
	50 <sup>Note 2</sup>	50	42.5	40.0

Note 1: Zinc mass is kept at 50 mg/m<sup>2</sup> or less, except at the edges of the sheet.  
 Note 2: Please consult us for one-side galvanized sheets, and one side zinc coating mass over 30 g/m<sup>2</sup>, or of JIS E24 or more.

## Thickness tolerance

Thickness tolerance is applied to the values obtained by adding the equivalent zinc thickness for each zinc coating mass symbol to the nominal thickness.

### Hot-rolled sheet

Product symbol	Nominal thickness	Width		
		Under 1200	1200 to less than 1500	1500 and over
SEHC SEHD SEHE	1.60 to less than 2.00	±0.16	±0.17	±0.18
	2.00 to less than 2.50	±0.17	±0.19	±0.21
	2.50 to less than 3.15	±0.19	±0.21	±0.24
	3.15 and over or less 3.20	±0.21	±0.23	±0.26

Product symbol	Nominal thickness	Width	
		1524 以下	
SE400 SE490	1.60 to less than 2.00	±0.19	
	2.00 to less than 2.50	±0.20	
	2.50 to less than 3.15	±0.22	
	3.15 and over or less 3.20	±0.24	

Product symbol	Nominal thickness	Width		
		Under 1200	1200 to less than 1500	1500 and over
KBEH370 KBEH400 KBEH440	1.60 to less than 2.00	±0.16	±0.17	±0.18
	2.00 to less than 2.50	±0.17	±0.19	±0.21
	2.50 to less than 3.15	±0.19	±0.21	±0.24
	3.15 and over or less 3.20	±0.21	±0.23	±0.26

### Cold-rolled sheet

Product symbol	Nominal thickness	Width				
		Under 630	630 to less than 1000	1000 to less than 1250	1250 to less than 1600	1600 and over
SECC	0.40 to less than 0.60	±0.05	±0.05	±0.05	±0.06	—
SECT	0.60 to less than 0.80	±0.06	±0.06	±0.06	±0.06	±0.07
SECD	0.80 to less than 1.00	±0.06	±0.06	±0.07	±0.08	±0.09
SECE	1.00 to less than 1.25	±0.07	±0.07	±0.08	±0.09	±0.11
SECF	1.25 to less than 1.60	±0.08	±0.09	±0.10	±0.11	±0.13
SECG	1.60 to less than 2.00	±0.10	±0.11	±0.12	±0.13	±0.15
SECC-8D	2.00 to less than 2.50	±0.12	±0.13	±0.14	±0.15	±0.17
SECC-4D	2.50 to less than 3.15	±0.14	±0.15	±0.16	±0.17	±0.20
SECC-2D	3.15 to less than 3.20	±0.16	±0.17	±0.19	±0.20	—

## Chemical conversion coating

Symbol	Chemical conversion coating
GX-GP	Phosphate treatment (chromate-free)
GX-K2	Anti-fingerprint treatment (chromate-free)
GX-KS	
GX-J2	Lubricant treatment (chromate-free)
M	(Uncoated)

Reference: Uncoated materials are normally oiled.

Product symbol	Nominal thickness	Width			
		Under 630	630 to less than 1000	1000 to less than 1250	1250 to less than 1600
KBEC340R KBEC390R KBEC440R	0.40 to less than 0.60	±0.05	±0.05	±0.05	—
	0.60 to less than 0.80	±0.06	±0.06	±0.06	±0.07
	0.80 to less than 1.00	±0.07	±0.07	±0.08	±0.09
	1.00 to less than 1.25	±0.08	±0.08	±0.09	±0.10
	1.25 to less than 1.60	±0.09	±0.10	±0.11	±0.12
	1.60 to less than 2.00	±0.10	±0.11	±0.12	±0.14
	2.00 to less than 2.80	±0.12	±0.13	±0.14	±0.16

## Range of available products

### Equivalent zinc thickness

Zinc coating mass symbol	EB	E8	E16	E24	E32	E40	K	10	20	30	40	50
Equivalent zinc thickness (one side)	0	0.001	0.003	0.004	0.005	0.006	0	0.001	0.003	0.004	0.005	0.006

### Width tolerance

Width	Base sheet	
	Hot-rolled sheet	Cold-rolled sheet
Under 1250	+10 - 0	+ 7 + 0
1250 and over	+10 - 0	+10 - 0

### Length tolerance

Hot-rolled sheet		Cold-rolled sheet	
+15	- 0	+15	- 0


### Coil inside diameter, outside diameter, mass

Inside diameter mm(in)	Outside diameter mm	Mass ton
508 (20), 610 (24)	1770 max.	25 max.



### Cut sheet length

Thickness mm	Width mm	Length mm
0.4 and over or less 1.2	1294 or less	610 ~ 6096
1.2 or more	Entire width	914 ~ 6096

### Hot-rolled sheet

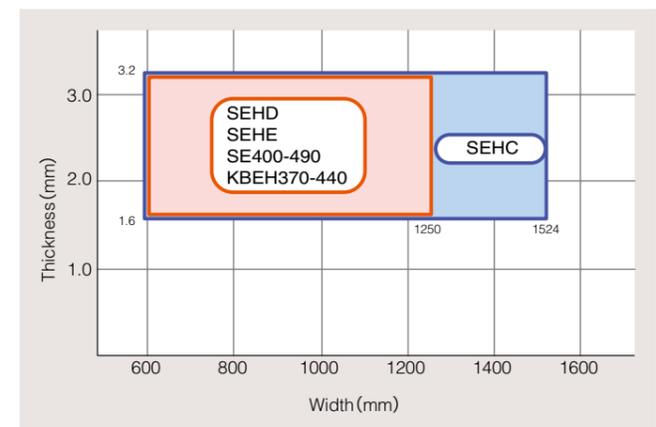

### Cold-rolled sheet

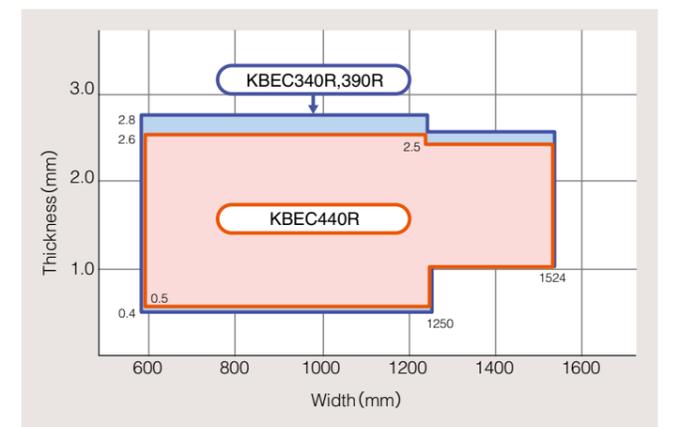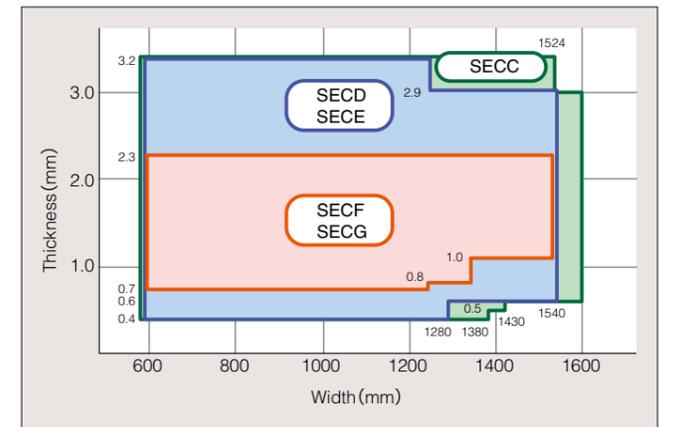

# Specification and range of available products

## Hot-dip galvanized steel sheet GALKOBE Galvanized steel sheets

### Product types

#### Hot-rolled sheet

Product symbol		Applications	Tensile test				Bending test								
Kobe Steel standard	JIS classification		Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation %		Test piece (JIS)	Bending angle	No. of inner spacers						
					Thickness, 1.6 mm and over				Thickness, 1.6mm to less than 3.0mm			Thickness, 3.0mm and over			
					Z27 or less	Z35, Z37			Z45, Z60	Z27 or less	Z35, Z37	Z45, Z60			
GAHC	SGHC	For commercial use	(205 and over)	(270 and over)	—		No.5 rolling direction	180°	1	2	2	2	2	2	
GAHS400	—	For structural use	245 and over	400 and over	18 and over				—	—	—	—	—	—	—
GAHS440	—		270 and over	440 and over	18 and over				—	—	—	—	—	—	
GAHS490	—		360 and over	490 and over	16 and over				—	—	—	—	—	—	
GAHS540	—		350 and over	540 and over	16 and over				—	—	—	—	—	—	
—	SGH400		295 and over	400 and over	18 and over				2	2	2	3	3	3	
—	SGH440		335 and over	440 and over	18 and over				3	3	3	3	3	3	
—	SGH490		365 and over	490 and over	16 and over				3	3	3	3	3	3	
—	SGH540		400 and over	540 and over	16 and over				3	3	3	3	3	3	
KBGH390	—	For forming	250 and over	390 and over	30 and over				—	—	—	—	—	—	
KBGH440	—		300 and over	440 and over	29 and over				—	—	—	—	—	—	

Note 1: Figures in parentheses are for reference.

Note 2: Values for the bending test represent the number of sheets of the same nominal thickness as measured by the spacing of the inside of the bend.

Note 3: Please consult us for products of Z27 or more.

#### Cold-rolled sheet

Product symbol		Applications	Tensile test							Bending test													
Kobe Steel standard	JIS classification		Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation %					Test piece (JIS)	Bending angle	No. of inner spacers											
					Nominal thickness mm							Thickness, 1.6 mm and over			Thickness, 1.6 mm to less than 3.0mm			Thickness, 3.0mm and over					
					0.40 to less than 0.60	0.60 to less than 1.0	1.0 to less than 1.6	1.6 to less than 2.5	2.5 and over			Z27 or less	Z35, Z37	Z45, Z60	Z27 or less	Z35, Z37	Z45, Z60	Z27 or less	Z35, Z37	Z45, Z60			
GACC	SGCC	For commercial use	(205 and over)	(270 and over)	—	—	—	—	—	No.5 rolling direction	180°	1	1	2	1	2	2	2	2	2			
GACD	SGCD1	For drawing (class 1)	—	270 and over	34 and over	36 and over	37 and over	38 and over	—			1	—	—	1	—	—	—	—	—	—		
GACE	SGCD2	For drawing (class 2)	—	270 and over	36 and over	38 and over	39 and over	40 and over	—			0 (Flat on itself)	—	—	0 (Flat on itself)	—	—	—	—	—	—		
GACX	SGCD3	For drawing (class 3)	—	270 and over	38 and over	40 and over	41 and over	42 and over	—														
—	SGCD4	For non-aging drawing (class 4)	—	270 and over	40 and over	42 and over	43 and over	44 and over	—			—	—	—	—	—	—	—	—	—	—		
GACS400	—	For structural use	245 and over	400 and over	18 and over	18 and over	18 and over	18 and over	18 and over			No.5 rolling direction	180°	—	—	—	—	—	—	—	—	—	
GACS440	—		335 and over	440 and over	18 and over	18 and over	18 and over	18 and over	18 and over					—	—	—	—	—	—	—	—	—	—
GACS490	—		365 and over	490 and over	16 and over	16 and over	16 and over	16 and over	16 and over					—	—	—	—	—	—	—	—	—	—
—	SGC400		295 and over	400 and over	18 and over	18 and over	18 and over	18 and over	18 and over					2	2	2	2	2	2	3	3	3	
—	SGC440		335 and over	440 and over	18 and over	18 and over	18 and over	18 and over	18 and over					3	3	3	3	3	3	3	3	3	
—	SGC490		365 and over	490 and over	16 and over	16 and over	16 and over	16 and over	16 and over					3	3	3	3	3	3	3	3	3	
—	SGC570		560 and over	570 and over	—	—	—	—	—					—	—	—	—	—	—	—	—	—	
KBGC340	—		For forming	195 and over	340 and over	33 and over	35 and over	36 and over	37 and over					38 and over	No.5 perpendicular to rolling direction	180°	—	—	—	—	—	—	—
KBGC390	—	255 and over		390 and over	28 and over	30 and over	31 and over	32 and over	33 and over	—	—	—	—	—			—	—	—				
KBGC440	—	295 and over		440 and over	24 and over	26 and over	27 and over	28 and over	29 and over	—	—	—	—	—			—	—	—				

Note 1: Figures in parentheses are for reference.

Note 2: Values for the bending test represent the number of sheets of the same nominal thickness as measured by the spacing of the inside of the bend.

Note 3: Please consult us for products of Z27 or more.

# Specification and range of available products

## Zinc coating mass

Type	Symbol	Minimum zinc coating mass g/m <sup>2</sup>		
		Both sides (triple-spot test)	Both sides (single-spot test)	One side (triple-spot test)
Both sides	(Z06)	(60)	(51)	—
	Z08	80	68	—
	Z10	100	85	—
	Z12	120	102	—
	Z14	140	119	—
	Z18	180	153	—
	Z20	200	170	—
	Z22	220	187	—
	Z25	250	213	—
	Z27	275	234	—
	Z35	350	298	—
	Z37	370	315	—
One side	45	—	—	30
	60	—	—	40
	90	—	—	60
	120	—	—	90

Note 1: Symbols and figures for zinc coating mass in parentheses are based on agreements reached between Kobe Steel and the purchaser on a case-by-case basis.

## Chemical conversion coating

Symbol	Chemical conversion coating
GX-GC	Chromate-free treatment
M	(Uncoated)

Reference: Uncoated materials are normally oiled.

## Surface finish

Symbol	Finish
Z	Zero and minimized spangle finish

## Equivalent zinc thickness

Zinc coating mass symbol	Z06	Z08	Z10	Z12	Z14	Z18
Equivalent zinc thickness (both sides)	0.013	0.017	0.021	0.026	0.029	0.034

Zinc coating mass symbol	Z20	Z22	Z25	Z27	Z35	Z37	Z45	Z60
Equivalent zinc thickness (both sides)	0.040	0.043	0.049	0.054	0.064	0.067	0.080	0.102

Zinc coating mass symbol	45	60	90	120
Equivalent zinc thickness (both sides)	0.006	0.008	0.013	0.017

## Thickness tolerance

Thickness tolerance is applied to the values obtained by adding the equivalent zinc thickness (both sides) for each zinc coating mass symbol to the nominal thickness.

### Hot-rolled sheet (for commercial use)

Nominal thickness	Width		
	Under 1200	1200 to less than 1500	1500 to less than 1800
1.6 to less than 2.0	±0.17	±0.18	±0.19
2.0 to less than 2.5	±0.18	±0.20	±0.22
2.5 to less than 3.15	±0.20	±0.22	±0.25
3.15 to less than 4.0	±0.22	±0.24	±0.27
4.0 and over or less 4.5	±0.25	±0.27	—

### Hot-rolled sheet (For structural use and forming)

Nominal thickness	Width	
	Under 1600	1600 and over
1.6 to less than 2.0	±0.20	±0.24
2.0 to less than 2.5	±0.21	±0.26
2.5 to less than 3.15	±0.23	±0.30
3.15 to less than 4.0	±0.25	±0.35
4.0 and over or less 4.5	±0.46	—

### Cold-rolled sheet (for commercial use)

Nominal thickness	Width			
	Under 630	630 to less than 1000	1000 to less than 1250	1250 to less than 1600
0.40 to less than 0.60	±0.06	±0.06	±0.06	±0.07
0.60 to less than 0.80	±0.07	±0.07	±0.07	±0.07
0.80 to less than 1.00	±0.07	±0.07	±0.08	±0.09
1.00 to less than 1.25	±0.08	±0.08	±0.09	±0.10
1.25 to less than 1.60	±0.09	±0.10	±0.11	±0.12
1.60 to less than 2.00	±0.11	±0.12	±0.13	±0.14
2.00 to less than 2.50	±0.13	±0.14	±0.15	±0.16
2.50 to less than 3.15	±0.15	±0.16	±0.17	±0.18
3.15 and over or less 3.20	±0.17	±0.18	±0.20	±0.21

## Width tolerance

Base sheet	Hot-rolled sheets			Cold-rolled sheets
	Tolerance classification		Width classification	
		A		B
1500 or less		+25	+10	+7
1500 or more		0	0	0

## Length tolerance

Hot-rolled sheet	Cold-rolled sheet
+15	+15
- 0	- 0

## Range of available products


### Coil inside diameter, outside diameter, mass

Inside diameter mm(in.)	Outside diameter mm	Mass ton
508 (20), 610 (24)	1850 max.	25 max.

### Cut sheet length


Thickness mm	Width mm	Length mm
Under 0.4	1294 or less	610 ~ 4880
0.4 and over or less 1.2	1294 or less	610 ~ 6096
	1294 or more	914 ~ 6096
1.2 or more	Entire width	914 ~ 6096

### Hot-rolled sheet

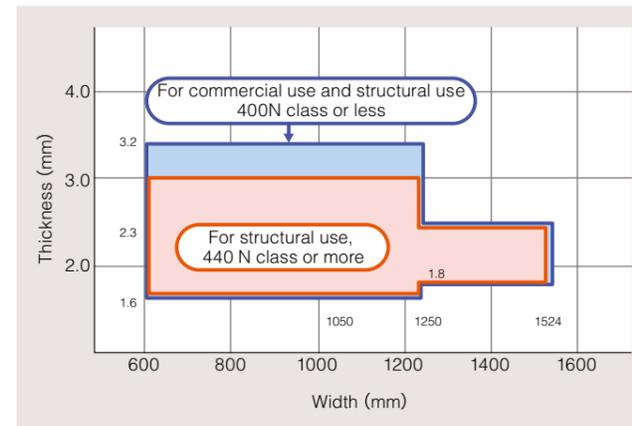

Reference: For thickness of hot-dip base sheet over 3.2, please consult us.

### Cold-rolled sheet

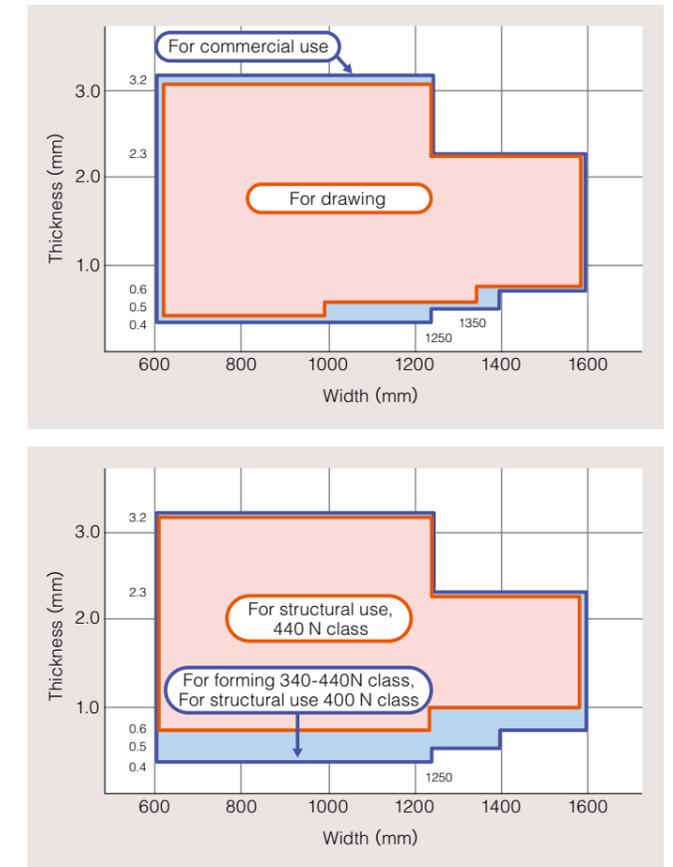

## Hot-dip galvanized steel sheet GALKOBE (Galvannealed)

### Product types

#### Hot-rolled sheet

Product symbol		Applications	JIS classification	Tensile test			Test piece (JIS)
Kobe Steel standard	JIS classification			Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation % Thickness, 1.6 mm and over	
GAHC-A	SGHC-A	For commercial use	SGHC	(205 and over)	(270 and over)	—	No.5 rolling direction
GAHS400-A	—	For structural use	—	245 and over	400 and over	18 and over	
GAHS440-A	—		—	270 and over	440 and over	18 and over	
GAHS490-A	—		—	360 and over	490 and over	16 and over	
GAHS540-A	—		—	350 and over	540 and over	16 and over	
—	SGH400-A		SGH400	295 and over	400 and over	18 and over	
—	SGH440-A		SGH440	335 and over	440 and over	18 and over	
—	SGH490-A	SGH490	365 and over	490 and over	16 and over		
—	SGH540-A	SGH540	400 and over	540 and over	16 and over		
KBAH390	—	For forming	—	250 and over	390 and over	30 and over	
KBAH440	—		—	300 and over	440 and over	29 and over	

Note 1: Figures in parentheses are for reference.

#### Cold-rolled sheet

Product symbol		Applications	JIS classification	Tensile test							Test piece (JIS)
Kobe Steel standard	JIS classification			Yield point N/mm <sup>2</sup>	Tensile strength N/mm <sup>2</sup>	Elongation %					
				Nominal thickness mm							
				0.40 to less than 0.60	0.60 to less than 1.0	1.0 to less than 1.6	1.6 to less than 2.5	2.5 and over			
GACC	SGCC-A	For commercial use	SGCC	(205 and over)	(270 and over)	—	—	—	—	—	No.5 rolling direction
GACD	SGCD1-A	For drawing (class1)	SGCD1	—	270 and over	34 and over	36 and over	37 and over	38 and over	—	
GACE	SGCD2-A	For drawing (class2)	SGCD2	—	270 and over	36 and over	38 and over	39 and over	40 and over	—	
GACX	SGCD3-A	For drawing (class3)	SGCD3	—	270 and over	—	40 and over	41 and over	42 and over	—	
—	SGCD4-A	For non-aging drawing (class4)	SGCD4	—	270 and over	—	42 and over	43 and over	44 and over	—	
GACS400-A	—	For structural use	—	245 and over	400 and over	18 and over	18 and over	18 and over	18 and over	18 and over	
GACS440-A	—		—	335 and over	440 and over	18 and over	18 and over	18 and over	18 and over	18 and over	
GACS490-A	—		—	365 and over	490 and over	16 and over	16 and over	16 and over	16 and over	16 and over	
—	SGC400-A		SGC400	295 and over	400 and over	18 and over	18 and over	18 and over	18 and over	18 and over	
—	SGC440-A		SGC440	335 and over	440 and over	18 and over	18 and over	18 and over	18 and over	18 and over	
—	SGC490-A		SGC490	365 and over	490 and over	16 and over	16 and over	16 and over	16 and over	16 and over	
—	SGC570-A	SGC570	560 and over	570 and over	—	—	—	—	—		
KBAC340	—	For forming	—	195 and over	340 and over	33 and over	35 and over	36 and over	37 and over	38 and over	No.5 perpendicular to rolling direction
KBAC390	—		—	255 and over	390 and over	28 and over	30 and over	31 and over	32 and over	33 and over	
KBAC440	—		—	295 and over	440 and over	24 and over	26 and over	27 and over	28 and over	29 and over	

Note 1: Figures in parentheses are for reference.

### Zinc coating mass

Type	Symbol	Minimum Zinc coating mass g/m <sup>2</sup>		
		Both sides (triple-spot test)	Both sides (single-spot test)	One side (triple-spot test)
Both sides	(F04)	(40)	(34)	—
	F06	60	51	—
	F08	80	68	—
	F10	100	85	—
	F12	120	102	—
One side	30	—	—	20
	45	—	—	30
	60	—	—	40
	90	—	—	60

### Chemical conversion coating

Symbol	Chemical conversion coating
GX-GC	Chromate-free treatment
M	(Uncoated)

Reference: Uncoated materials are normally oiled.

Note 1: Symbols and figures for zinc coating mass in parentheses are based on agreements reached between Kobe Steel and the purchaser on a case-by-case basis.

### Thickness tolerance

Thickness tolerance is applied to the values obtained by adding the equivalent zinc thickness (both sides) for each zinc coating mass symbol to the nominal thickness.

#### Hot-rolled sheet (for general use)

Nominal thickness	Width		
	Under 1200	1200 to less than 1500	1500 to less than 1800
1.6 to less than 2.0	±0.17	±0.18	±0.19
2.0 to less than 2.5	±0.18	±0.20	±0.22
2.5 to less than 3.15	±0.20	±0.22	±0.25
3.15 to less than 4.0	±0.22	±0.24	±0.27
4.0 and over or less 4.5	±0.25	±0.27	—

#### Hot-rolled sheet (For structural use and forming)

Nominal thickness	Width	
	Under 1600	1600 and over
1.6 to less than 2.0	±0.20	±0.24
2.0 to less than 2.5	±0.21	±0.26
2.5 to less than 3.15	±0.23	±0.30
3.15 to less than 4.0	±0.25	±0.35
4.0 and over or less 4.5	±0.46	—

#### Cold-rolled sheet

Nominal thickness	Width			
	Under 630	630 to less than 1000	1000 to less than 1250	1250 to less than 1600
0.40 to less than 0.60	±0.06	±0.06	±0.06	±0.07
0.60 to less than 0.80	±0.07	±0.07	±0.07	±0.07
0.80 to less than 1.00	±0.07	±0.07	±0.08	±0.09
1.00 to less than 1.25	±0.08	±0.08	±0.09	±0.10
1.25 to less than 1.60	±0.09	±0.10	±0.11	±0.12
1.60 to less than 2.00	±0.11	±0.12	±0.13	±0.14
2.00 to less than 2.50	±0.13	±0.14	±0.15	±0.16
2.50 to less than 3.15	±0.15	±0.16	±0.17	±0.18
3.15 and over or less 3.20	±0.17	±0.18	±0.20	±0.21

#### Equivalent zinc thickness

Zinc coating mass symbol	F04	F06	F08	F10	F12	F18
Equivalent zinc thickness (both sides)	0.008	0.013	0.017	0.021	0.026	0.034
Zinc coating mass symbol	30	45	60	90		
Equivalent zinc thickness (one side)	0.004	0.006	0.008	0.013		

### Width tolerance

Tolerance classification	Hot-rolled sheets		Cold-rolled sheets
	A	B	
1500 or less	+25	+10	+7
1500 or more	0	0	+10

### Length tolerance

Hot-rolled sheet	Cold-rolled sheet
+15	+15
- 0	- 0

### Range of available products


#### Coil inside diameter, outside diameter, mass

Inside diameter mm(in.)	Outside diameter mm	Mass ton
508 (20), 610 (24)	1850 max.	25 max.

#### Cut sheet length



Thickness mm	Width mm	Length mm
0.4 Under	1294 or less	610 ~ 4880
0.4 and over or less 1.2	1294 or less	610 ~ 6096
	1294 or more	914 ~ 6096
1.2 or more	Entire width	914 ~ 6096

#### Hot-rolled sheet

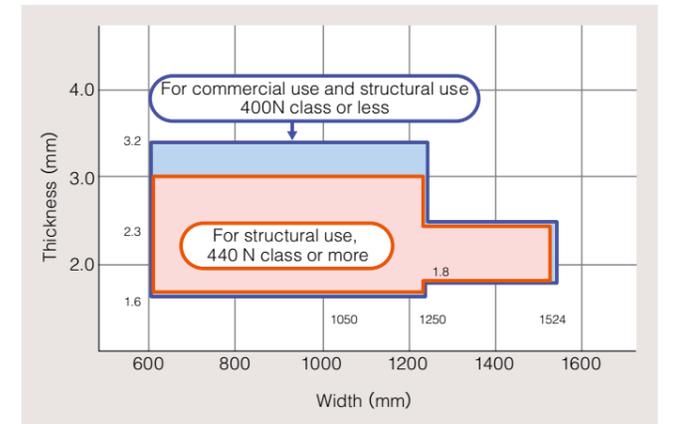


Reference: For thickness of hot-dip base sheet over 3.2, please consult us.

#### Cold-rolled sheet

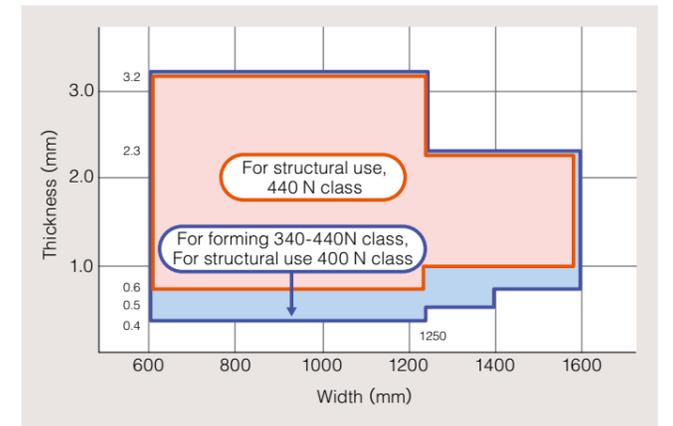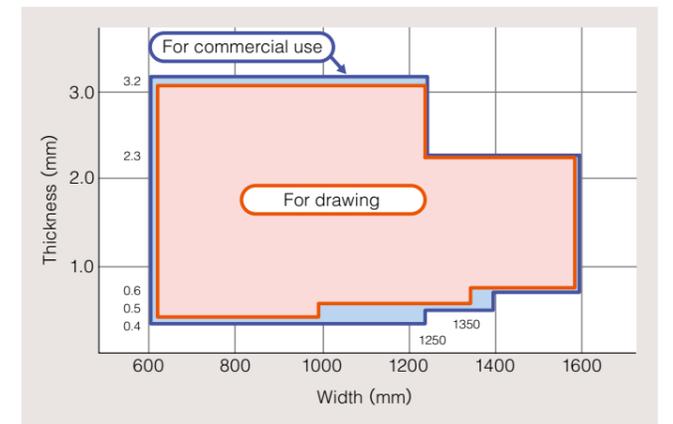

# Packaging and Identification

## ■ Packaging

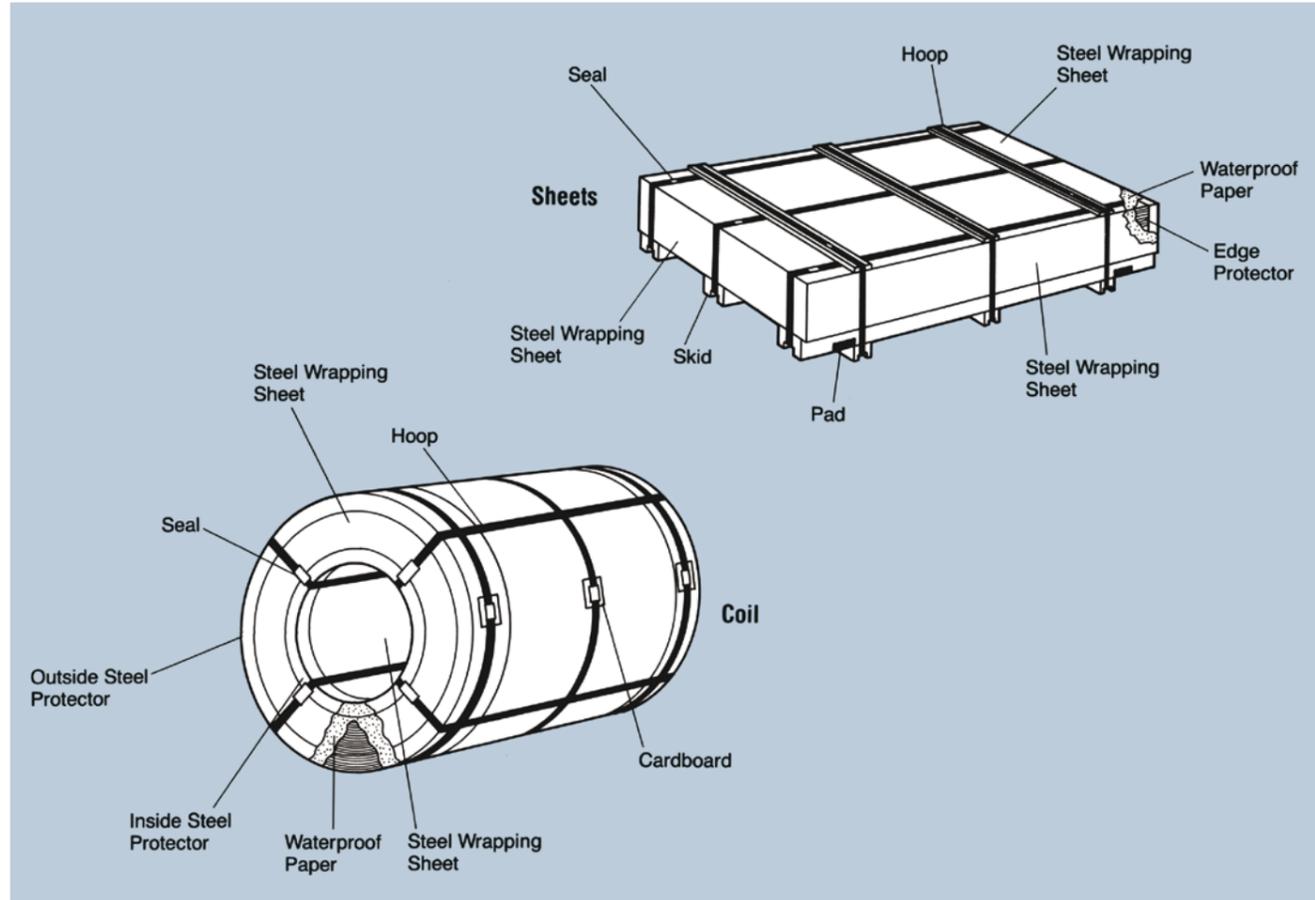

## ■ Identification

Every package has an identification sticker printed with specifications, package number, dimensions, mass, number of sheets (when applicable), material grade, customer name, and other pertinent information.

<b>KOBELCO</b> ELECTRO-GALVANIZED STEEL SHEET IN COIL			
SPEC <b>SECC</b>		PACK. NO	
SIZE <b>0.800MM X 1219MM X COIL</b>			
NET-MASS		GROSS-MASS	
C. NO			
COATING-MASS <b>E16/E16</b>	S. T <b>GX-K2</b>	S. FINISH	
<b>KOBE STEEL, LTD.</b> MADE IN JAPAN		<b>KOBE STEEL, LTD.</b> MADE IN JAPAN	

## Notes for use

To get the best performance from your Kobe Steel's galvanized steel sheet, please observe the following precautions for use.

### ■ Storage

Under normal transport, storage, and processing conditions, there is little danger of rust. However, if the sheets are stored for long periods of time in a place exposed to rainwater or dew, or in high humidity, white rust can develop. To avoid this, choose a dry, clean place for storage. If the packing paper is torn, cover the torn area immediately.

### ■ Handling

The zinc coatings are softer and more easily damaged than the steel sheet base. Although surface scratches will not immediately give rise to red rust, they mar the product's attractiveness. In addition, white rust can develop if the chemical treatment coating is damaged. The sheets should therefore be handled with reasonable care.

If the sheets are stained with press oil, machine oil, sweat, or fingerprints, they cannot deliver full performance. They should therefore be thoroughly cleaned before use.

### ■ Processing

Galvanized steel sheet is covered with a soft zinc surface. When rolling or pressing it, care must be taken to damage the sheet surface. Make sure that equipment and molds are clean and free of all foreign materials before processing.

The nominal thickness of galvanized steel sheet is the same as the thickness of the base sheet. When the zinc coating is thick, allowance must be made for the extra thickness when setting a mold clearance.

### ■ Welding

Appropriate welding conditions should be selected according to the zinc coating mass and chemical treatment applied.

Electrodes for resistance welding use copper alloy, which easily alloys with zinc. It may result in stain and/or deformation of the electrode chip; therefore, it is necessary to dress or replace the chip during operation.

### ■ Degreasing and painting

Painting with insufficient degreasing may result in a painting defect; therefore, sufficient degreasing is critical. Do not use strong alkali degreasing agent, since it may significantly damage the surface.

Galvanized steel sheets with chemical treatment provide excellent paint adhesion; however, choose a paint that is compatible with the chemical treatment applied. Otherwise, it may result in poor paint adhesion.

# **KOBE STEEL, LTD.**

## **Steel & Aluminum Business**

### **Kobe Head Office**

2-4, Wakinohama-Kaigandori 2-chome, Chuo-ku, Kobe, Hyogo, 651-8585, Japan

### **Tokyo Head Office**

ON Building, 9-12, Kita-Shinagawa 5-chome, Shinagawa-ku, Tokyo, 141-8688, Japan

### **Osaka Branch Office**

Midosuji Mitsui Building, 1-3, Bingomachi 4-chome, Chuo-ku, Osaka, Osaka, 541-8536, Japan

### **Nagoya Branch Office**

Nagoya Prime Central Tower 15th Floor, 27-8, Meieki 2-chome, Nishi-ku, Nagoya, Aichi, 451-0045, Japan

### **Hokkaido Sales Office**

Nippon Seimei Kitamonkan Building 4F, 1-3, Kita-Shijo Nishi 5-chome, Chuo-ku, Sapporo, Hokkaido, 060-0004, Japan

### **Tohoku Sales Office**

Sendai NS Building, 2-25, Ichibancho 1-chome, Aoba-ku, Sendai, Miyagi, 980-0811, Japan

### **Hokuriku Sales Office**

Urban Place, 18-7 Ushijimacho, Toyama, Toyama, 930-0858, Japan

### **Chugoku and Shikoku Sales Office**

GRANODE Hiroshima 8th Floor, 3-5-7 Futabanosato, Higashi-ku, Hiroshima, Hiroshima, 732-0057, Japan

### **Kyushu Sales Office**

Shinkansen Hakata Building, 1-1 Hakataeki Chuogai, Hakata-ku, Fukuoka, Fukuoka, 812-0012, Japan

### **Okinawa Sales Office**

Naha Shintoshin Media Building-West, 3-31, Omoromachi 1-chome, Naha, Okinawa, 900-0006, Japan